



Tel : 0843 351 2802 Fax : 0800 317693  
Email : sales@swiftuk.co.uk



GN1100

Hot Water Tap

Moulded Plug (10A fuse)

InSinkEerator

Chrome Brushed Steel

Guarantee : 2 Years Parts and Labour

Hot Water Tap complete with Filter

Gentle touch lever dispenser

Steaming Hot Water instantly with adjustable temperature dial from 88°C to 98°C


2.5 Litre Stainless Steel tank dispenses approximately 100 cups per hour

Auto-hot shut-off

360° Swivel Spout

Filtered Drinking Water with replaceable cartridges

Based on an average household usage of 10 cups per day it is 20% less expensive to operate than a standard electric kettle

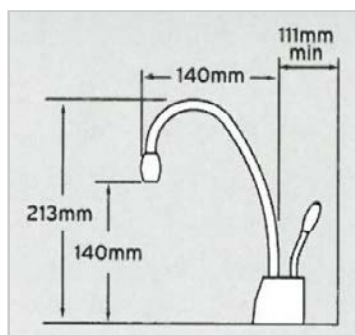

Replacement Filter - F701R (pack of 2)

Chlorine, taste and odour filter with additional lead protection and a scale reduction capability  
It filters sediment to a 5 micron level  
Replacement recommended 6 monthly

Water Pressure : 172 kPa - 862 kPa (1.7 bar - 8.6 bar;  
25 psi - 125 psi)


Max. Worktop Thickness : 76mm

Tap Hole Cut Out : 32mm - 38mm

Ambient (room) temperature between 1°C and 38°C

Plugs directly into electrical socket close to appliance

Outlet must be fused and should not be controlled by the same wall switch that operates the food waste disposer

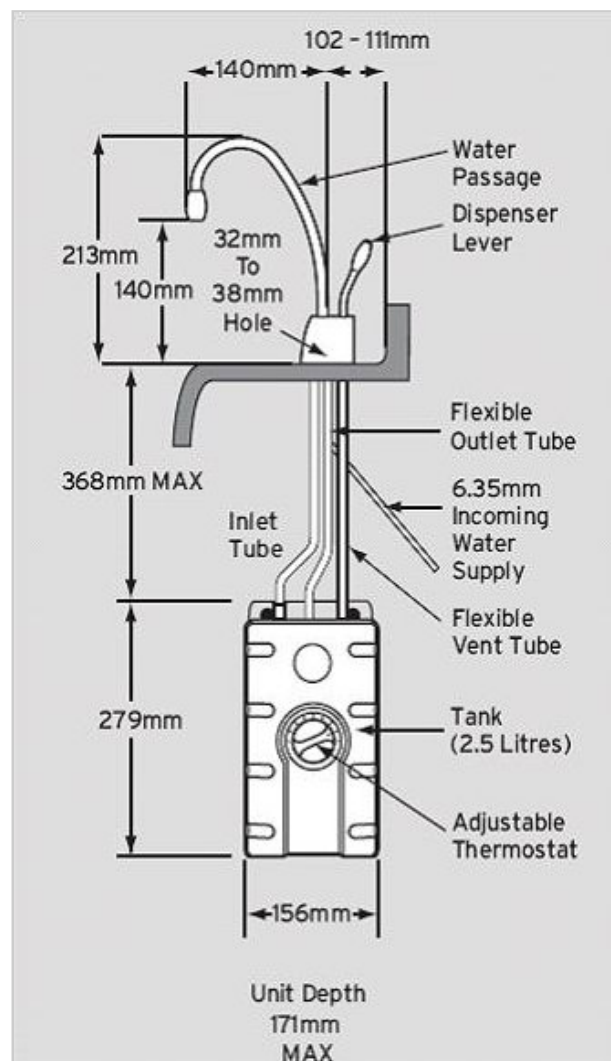

Service : Tel 0800 3893715

[www.aquathermservices.com](http://www.aquathermservices.com)

*Whilst every effort has been made to ensure that all descriptions are correct, this should not be regarded as an infallible guide, nor as an offer for sale of any particular product*